





Thin Client Atrust t68LD

Atrust t68LD is a Linux-based thin client device especially designed for a client/server computing environment. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t68LD. With the support of Citrix® ICA/HDX™, Microsoft® RDP with RemoteFX™ and VMware® Horizon View™, t68LD can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t68LD offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

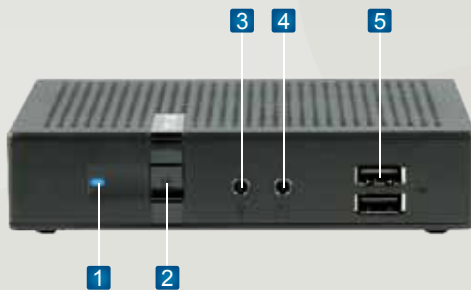

- 1 Power LED**
Indicates the status of power.
- 2 Power Button**
Press to turn on/off the client.
- 3 Microphone Port**
Connects to a microphone.
- 4 Headphone Port**
Connects to a headphone or a speaker system.
- 5 USB 2.0 Port x 2**
Connects to a USB device.
- 6 DC IN**
Connects to an AC adaptor.

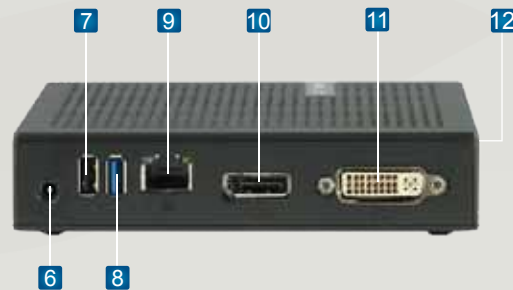

- 7 USB 2.0 Port**
Connects to a USB device.
- 8 USB 3.0 Port**
Connects to a USB device.
- 9 LAN Port**
Connects to a host server through a LAN switch.
- 10 DisplayPort**
Connects to a monitor.
- 11 DVI-I Port**
Connects to a monitor.
- 12 Kensington Lock Slot**
Attach the t68LD to a permanent object with the Kensington slot and a security cable.

Atrust t68LD Features

Low total cost of ownership

Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.

Slim and quiet design

The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, t68LD helps create a simple and noiseless workplace environment.

Simple click and play

t68LD connects to the host server with a Remote Desktop connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

Rich remote user experience

With Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t68LD can provide a rich, efficient, and "local" computing experience for remote users.

Easy management and maintenance

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.



Atrust t68LD

System	
Processor	Intel® Bay Trail Dual Core 1.58GHz
Memory	
System memory	2GB
Flash memory	4GB
Graphics	
Maximum resolutions	DVI-I : 1920 x 1200, DisplayPort : 2560 x 1440
I/O Interfaces	
I/O ports	Front: 2 x USB 2.0, 1 x Headphone port, 1 x Microphone port, Rear: 1 x DVI-I, 1 x DisplayPort, 1 x USB 2.0, 1 x USB 3.0, 1 x RJ-45, 1 x DC IN, 1 x Kensington lock slot
Networking	
Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 135 x (D) 93 x (H) 29 mm
Weight	278 g (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+5V DC
Power consumption : Suspend / Idle / Active	0.26W / 4.35W / 5.73W
Software	
Operating system	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™ (PCoIP/RDP/Blast)
Regulatory	CB, NRTL, FCC, CE, VCCI, BSMI
Options	VESA Mount Kit: (W) 114 x (D) 60 x (H) 6 mm

© 2018 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.