





Zero Client **Atrust** m302

Atrust m302 is a zero client designed as an endpoint of a shared resource system, such as a MultiPoint Server™ or Useful Multiplatform™ system. The solution enables a host server to power multiple and independent stations. Each station only consists of one station hub (zero client) with a keyboard, mouse, and monitor connected, allowing multiple users to share the computing power of one single server. Simply through a USB connection, the server provides each station user with a familiar and independent Windows® experience.

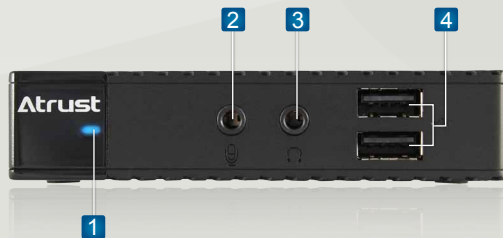

- 1 Power LED**
Indicates the status of power.
- 2 Microphone Port**
Connects to a microphone.
- 3 Headphone Port**
Connects to a set of headphones or a speaker system.
- 4 USB Port**
Connects to a USB device.
- 5 DC IN**
Connects to an AC adaptor.

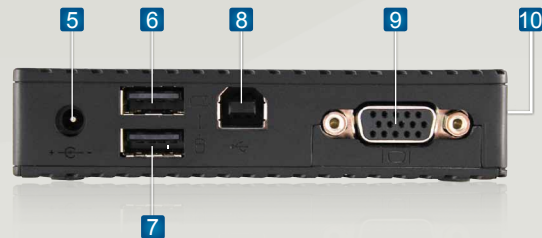

- 6 USB Port**
Connects to a mouse.
- 7 USB Port**
Connects to a keyboard.
- 8 USB Port**
Connects to the host server.
- 9 VGA Port**
Connects to a monitor.
- 10 Kensington Lock Slot**
Attach your m302 to a permanent object with the Kensington slot and a security cable.

Atrust m302 Features

Low total cost of ownership

Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.

Slim and quiet design

m302 is feather light weighing only 112g. The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, m302 helps create a simple and noiseless workplace environment.

Extra USB ports

m302 is equipped with two extra USB ports for additional USB devices.

Simple plug and play setup

Just attach a keyboard, mouse, and monitor to your m302, and then connect it to the host server. A station is set up easily and ready for use right away.

Easy management and maintenance

Since all computing tasks are performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.



Atrust m302

System	
Main Chip	SOC SMSC UFX6000
Graphics	
Maximum resolutions	1920 x 1080
I/O Interfaces	
Video	VGA-type video output (D-sub 15)
I/O ports	1 x VGA 1 x USB B type (to the host server) 2 x USB A type 2 x USB A type 1 x headphone 1 x microphone 1 x DC IN 1 x Kensington lock slot
Networking	
Host connection	USB 2.0
USB Cable	3 meters USB cable with B type connector
Dimensions / Weight	
Dimensions	(W) 100 x (D) 66 x (H) 23mm
Weight	112g (approximate, AC adaptor excluded)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating / Output voltage	100 ~ 240 VAC / +5V DC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	2A
Energy Consumption	
Active power	Around 2.3W
Server OS Support	
	Windows MultiPoint Server 2012 Userful MultPlatform 6.0
Regulatory	
	CB, FCC, CE, BSMI, NRTL
Option	
	VESA Mount Kit (W) 114 x (D) 60 x (H) 6 mm

© 2013 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. To learn more, visit www.Atrustcorp.com.

Atrust

Atrust Computer Corp.

3F, 361 Fusing 1st Rd., Gueishan, Taoyuan County 333, Taiwan
T.+886-3-3288837 F.+886-3-3288973
sales@atrustedcorp.com www.atrustrcorp.com

