


Thin Client Atrust t21

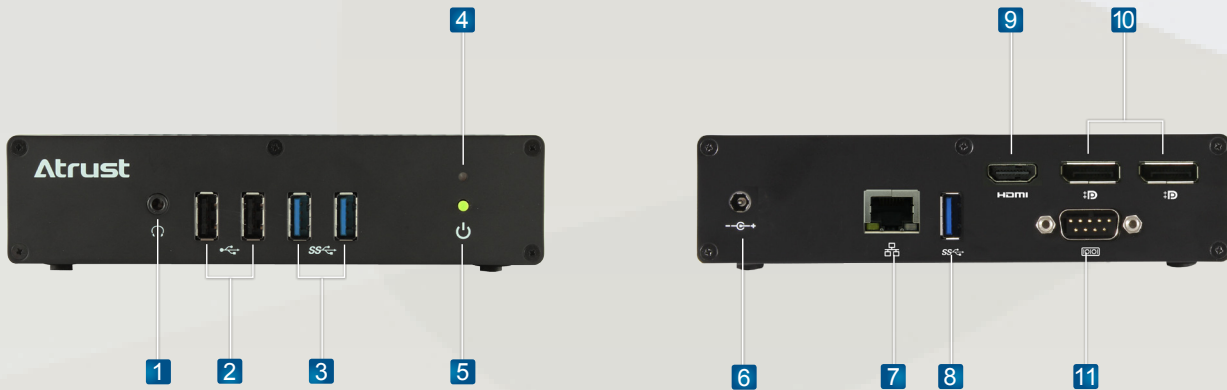

1 Headphone Port

Connects to a headphone or speaker system.

2 USB 2.0 Port x 2

Connects to a USB device.

3 USB 3.0 Port x 2

Connects to a USB device.

4 Power LED

Indicates the status of power.

5 Power Button

Press to turn on/off the client.

6 DC IN

Connects to an AC adaptor.

7 LAN Port

Connects to a host server through a LAN switch.

8 USB 3.0 Port

Connects to a USB device.

9 HDMI Port

Connects to a monitor.

10 DisplayPort x 2

Connects to a monitor.

11 Serial Port (RS-232)

Connects to a serial port device.

Atrust t21 Features



▶ Durable and quiet design

▶ Simplified management

▶ Slim and robust design

▶ Ingress Protection Rating IP50

▶ Low power consumption

▶ Lower total cost of ownership (TCO)

▶ Supported Protocols

t21 supports the following protocols:
Citrix® ICA/HDX™, Microsoft® RDP™, VMware Horizon

Atrust t21

System	
Processor	Intel® Elkhart Lake J6412 Quad Core
Memory	
System memory	4 GB (Manufacturing option : 8 GB)
Storage	
Storage	128 GB M.2 NVMe SSD (Manufacturing option : 256 GB / 512 GB)
Graphics	
Maximum resolution	DisplayPort : 4096 x 2160@60Hz HDMI : 3840 x 2160@30Hz
I/O Interfaces	
I/O ports	Front : 2 x USB-A Port (USB 2.0), 2 x USB-A Port (USB 3.2 Gen 1), 1 x Headphone Port Rear : 2 x Dual-Mode Displayport, 1 x HDMI Port, 1 x USB-A Port (USB 3.2 Gen 1), 1 x Serial Port, 1 x LAN Port, 1 x DC IN
Networking	
Ethernet	10 M / 100 M / 1 G
Dimensions / Weight	
Dimensions	(W) 155 x (D) 109.6 x (H) 37 mm
Weight	854g (approximate) * Without Accessories
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 40°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95% (non-condensing)
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+12V DC
Software	
Operating system	Windows 10 IoT Enterprise LTSC 2021
System Management	ADM (Atrust Device Manager)
Ingress Protection Rating	IP50
Accessories	Power Adapter, Power Cord Adapter Holder (Option) : (W) 39.5 x (D) 108 x (H) 58.8 mm / Weight : 115 g VESA Kit (Option) : (W) 115.3 x (D) 62.8 x (H) 14.8 mm / Weight : 42 g Bracket Kit (Option) : (W) 212.5 x (D) 120 x (H) 60.2 mm / Weight : 944 g

© 2024 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.



Atrust Computer Corp.

3F., 361, Fusing 1st Rd., Gueishan Dist., Taoyuan City 333, Taiwan
T.+886-3-3288837 F.+886-3-3288973
sales@atrustcorp.com www.atrustcorp.com