




Thin Client Atrust t225LQ

Atrust t225LQ is a Linux-based thin client device especially designed for a client/server computing environment. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t225LQ. With the support of Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t225LQ can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t225LQ offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

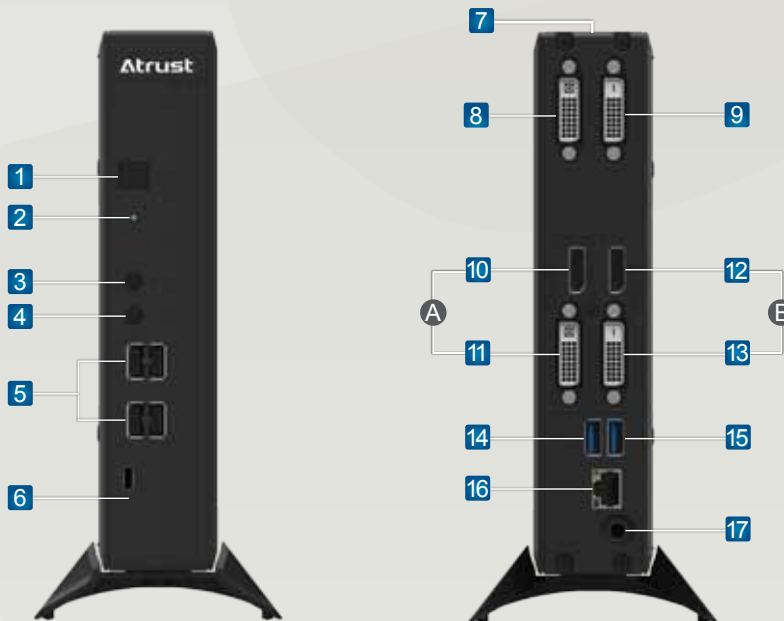

Note: A B
It is only allow to use one of two ports.

- | | | |
|---|--|---|
| <p>1 Power Button
Press to turn on/off the client.</p> <p>2 Power LED
Lights blue when powered on.</p> <p>3 Microphone Port
Connects to a microphone.</p> <p>4 Headphone Port
Connects to a set of headphones or speaker system.</p> <p>5 USB 2.0 Port x 4
Connects to a USB device.</p> | <p>6 USB 3.2 Gen 1 Type C
Connects to a USB device.</p> <p>7 Kensington Lock Slot
Connects a Kensington cable to secure the thin client.</p> <p>8 DVI-I
Connects to a monitor.</p> <p>9 DVI-D
Connects to a monitor.</p> <p>10 DisplayPort
Connects to a monitor.</p> <p>11 DVI-I
Connects to a monitor.</p> | <p>12 DisplayPort
Connects to a monitor.</p> <p>13 DVI-D
Connects to a monitor.</p> <p>14 USB 3.2 Gen 1
Connects to a USB device.</p> <p>15 USB 3.2 Gen 1
Connects to a USB device.</p> <p>16 LAN Port
Connects to a local area network.</p> <p>17 DC IN
Connects to an AC adaptor.</p> |
|---|--|---|

Atrust t225LQ Features

- ▶ Quad display support
- ▶ Durable and quiet design
- ▶ Simplified management
- ▶ Slim and robust design
- ▶ Low power consumption
- ▶ Lower total cost of ownership (TCO)
- ▶ Supported Protocols
t225LQ supports the following protocols:
Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™

Atrust t225LQ

System	
Processor	Intel® Apollo Lake x5-E3940 Quad Core 1.60GHz (Burst 1.80GHz)
Memory	
System memory	4GB
Flash memory	8GB
Graphics	
Maximum resolutions	DVI-I / DVI-D : 1920 x 1200, DisplayPort : 4096 x 2160@60Hz
I/O Interfaces	
I/O ports	Front: 4 x USB 2.0, 1 x USB 3.2 Gen 1 Type-C, 1 x Audio Out, 1 x Microphone In, Rear: 2 x DVI-I, 2 x DVI-D, 2 x DisplayPort, 2 x USB 3.2 Gen 1, 1 x RJ-45, 1 x DC IN * Maximum Quad Display.
Networking	
Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 45.6 x (D) 189 x (H) 204 mm
Weight	1.15 Kg (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	5°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95% (non-condensing)
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3.42A
Output voltage	+19V DC
Software	
Operating system	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™ (PCoIP/RDP/Blast)
Manufacturing options	WiFi : IEEE 802.11a/b/g/n/ac Intel® Apollo Lake N4200 Quad Core 1.10 GHz (Turbo 2.50 GHz)

© 2020 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.Atrustcorp.com.