




Thin Client Atrust t225W

Atrust t225W is a Windows Embedded OS based thin client computer. Developed by Atrust, the ACS (Atrust Client Setup) software is also built in to help effective management of t225W. With the support of Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t225W can be used to create virtual and session-based desktop experiences from many remote desktop capable operating systems. t225W offers a rich computing experience where applications look, feel, and behave as local devices, including high-definition multimedia content.

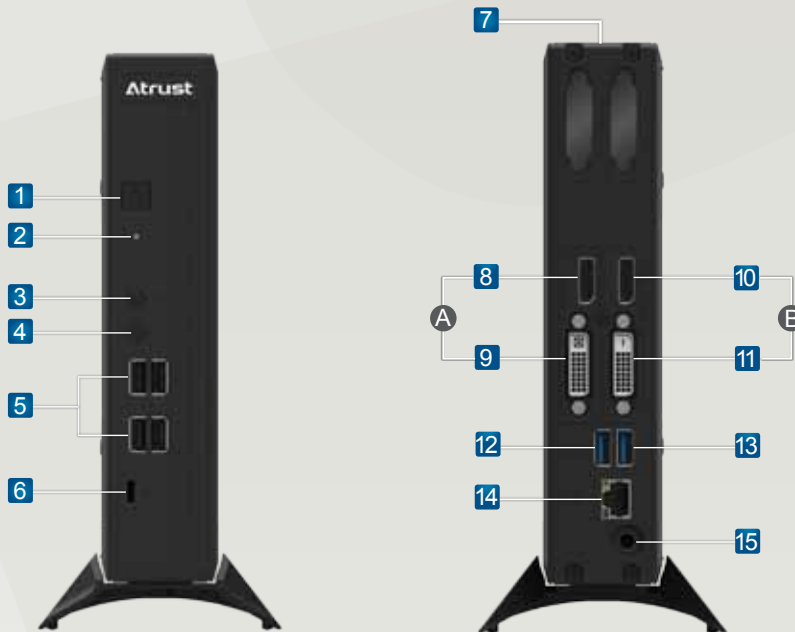

Note: A B
It is only allow to use one of two ports.

- 1 Power Button**
Press to turn on/off the client.
- 2 Power LED**
Lights blue when powered on.
- 3 Microphone Port**
Connects to a microphone.
- 4 Headphone Port**
Connects to a set of headphones or speaker system.
- 5 USB 2.0 Port x 4**
Connects to a USB device.

- 6 USB 3.2 Gen 1 Type C**
Connects to a USB device.
- 7 Kensington Lock Slot**
Connects a Kensington cable to secure the thin client.
- 8 DisplayPort**
Connects to a monitor.
- 9 DVI-I**
Connects to a monitor.
- 10 DisplayPort**
Connects to a monitor.

- 11 DVI-D**
Connects to a monitor.
- 12 USB 3.2 Gen 1**
Connects to a USB device.
- 13 USB 3.2 Gen 1**
Connects to a USB device.
- 14 LAN Port**
Connects to a local area network.
- 15 DC IN**
Connects to an AC adaptor.

Atrust t225W Features

- ▶ Dual display support
- ▶ Durable and quiet design
- ▶ Simplified management
- ▶ Slim and robust design
- ▶ Low power consumption
- ▶ Lower total cost of ownership (TCO)
- ▶ Supported Protocols
t225W supports the following protocols:
Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™

Atrust t225W

System	
Processor	Intel® Apollo Lake x5-E3940 Quad Core 1.60GHz (Burst 1.80GHz)
Memory	
System memory	4GB (Manufacturing option : 8GB)
Flash memory	32GB
Graphics	
Maximum resolutions	DVI-I / DVI-D : 1920 x 1200, DisplayPort : 4096 x 2160@60Hz
I/O Interfaces	
I/O ports	Front: 4 x USB 2.0, 1 x USB 3.2 Gen 1 Type-C, 1 x Audio Out, 1 x Microphone In, Rear: 1 x DVI-I, 1 x DVI-D, 2 x DisplayPort, 2 x USB 3.2 Gen 1, 1 x RJ-45, 1 x DC IN * Maximum Dual Display.
Networking	
Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 45.6 x (D) 189 x (H) 204 mm
Weight	1.1 Kg (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	5°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95% (non-condensing)
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3.42A
Output voltage	+19V DC
Software	
Operating system	Windows® 10 IoT Enterprise 2016 LTSC Windows® 10 IoT Enterprise 2019 LTSC
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™ (PCoIP/RDP/Blast)
Manufacturing options	Dual Core CPU WiFi : IEEE 802.11a/b/g/n/ac RS-232 Port x 4 TPM Intel® Apollo Lake N4200 Quad Core 1.10 GHz (Turbo 2.50 GHz)

© 2020 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.Atrustcorp.com.