




Atrust 14" Mobile Thin Client mt183L

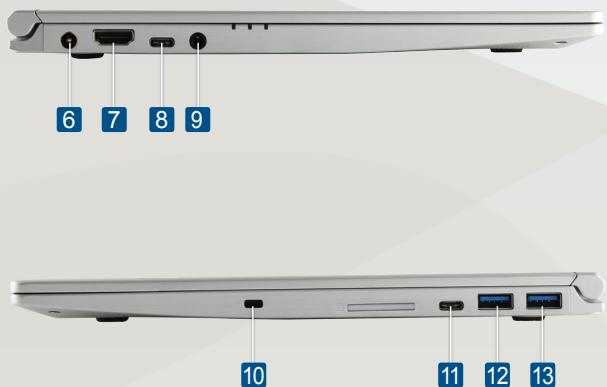

1 Web Camera

Built-in web camera.

2 Power Button

Press to turn on the client.

3 Keyboard

Built-in keyboard for control and input.

4 Speakers

Built-in Speaker for audio output.

5 Touchpad

Built-in pointing device for control and input.

6 DC IN

Connects to an AC adapter.

7 HDMI® Port

Connects to a monitor.

8 USB 3.2 Gen 2 Type-C

Connects to a USB device, Support USB-C charging / display.

9 Audio Combo

Headphone / Microphone Combo.

10 Kensington Lock Slot

Connects a Kensington cable to secure the mobile thin client.

11 USB 3.2 Gen 2 Type-C

Connects to a USB device, Support display.

12 USB 3.2 Gen 1 Type-A

Connects to a USB device.

13 USB 3.2 Gen 1 Type-A

Connects to a USB device.

Atrust mt183L Features

Low total cost of ownership

Additional computing access is as simple as adding more thin client devices. The total cost of ownership is then drastically reduced.

Simple click and play

Connects this device to the host server with a Remote Session connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

Rich remote user experience

Support Citrix® HDX / ICA™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, this device can provide a rich and efficient computing experience.

Easy management and maintenance

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.

Atrust mt183L Mobile Thin Client

System

Processor	Intel® i3-1115G4 Processor (6M Cache, up to 4.1 GHz, Dual-Core) Intel® i5-1135G7 Processor (8M Cache, up to 4.2 GHz, Quad-Core)
-----------	--

Memory

System memory	4 GB (Manufacturing option : 8 GB)
Flash memory	64 GB (Manufacturing option : 128 GB / 256 GB)

Display

LCD Type / Resolution	14" / 1920 x 1080 FHD
HDMI® / Type-C Display	Up to 4096 x 2160 @ 60Hz

I/O Interfaces

I/O ports	1 x HDMI® Port, 2 x USB 3.2 Gen 1 Type-A, 2 x USB 3.2 Gen 2 Type-C, 1 x Audio Combo, 1 x DC IN, 1 x Web Camera, 2 x 2W Internal Speaker, 1 x Internal Microphone
-----------	--

Networking

Ethernet	USB 3.2 Gen 1 Type-A to Gigabit Ethernet Adapter or USB 3.2 Gen 1 Type-C to Gigabit Ethernet Adapter
Wireless	IEEE 802.11 a / b / g / n / ac

Dimensions / Weight

Dimensions	(W) 322 x (D) 222 x (H) 15.95 mm
Weight	1.2 kg (approximate)

Environment

Operating temperature	5°C ~ 35°C
Non-operating temperature	-20°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95% (non-condensing)

Power Adapter

USB Type-C	65W USB-C Power Adapter
AC Adapter	19V, 65W, 3.42A (Optional)
Battery capacity	3290 mAh Average Time : 5h 55m (Intel® i3-1115G4)

Software

Operating system	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA / HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™
Manufacturing option	TPM 2.0

© 2026 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.



Atrust Computer Corp.

3F, 361 Fusing 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan
T.+886-3-3288837 F.+886-3-3288973
sales@atrustcorp.com www.atrustcorp.com