




Atrust 14" Mobile Thin Client mt185L

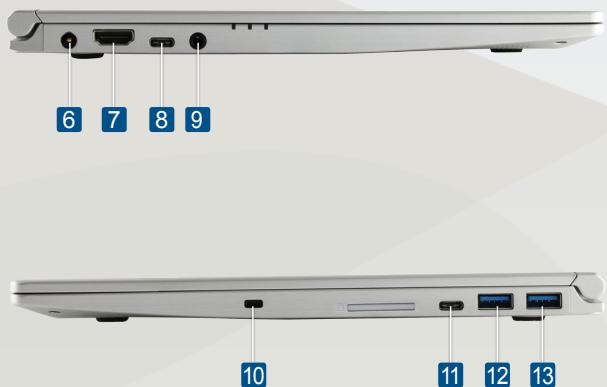

1 Webcam
Built-in web camera.

2 Power Button
Press to turn on the client.

3 Keyboard
Built-in keyboard for control and input.

4 Speakers
Built-in Speaker for audio output.

5 Touchpad
Built-in pointing device for control and input, Support Multi-Touch Touchpad Gestures.

6 DC IN
Connects to an AC adapter.

7 HDMI® Port
Connects to a monitor*.

8 USB-C Port (USB 3.2 Gen 2)
Connects to a USB device, Support USB-C charging / display*.

9 Audio Combo Jack
Headphone / Microphone Combo.

10 Kensington Security Slot
Connects to a Kensington security lock.

11 USB-C Port (USB 3.2 Gen 2)
Connects to a USB device, Support display*.

12 USB-A Port (USB 3.2 Gen 1)
Connects to a USB device.

13 USB-A Port (USB 3.2 Gen 1)
Connects to a USB device.
* Max 3 of Displays Supported Simultaneously , including Built-in LCD display.

Atrust mt185L Features

Low total cost of ownership

Additional computing access is as simple as adding more thin client devices. The total cost of ownership is then drastically reduced.

Simple click and play

Connects this device to the host server with a Remote Session connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

Rich remote user experience

Support Citrix® HDX / ICA™, Microsoft® RDP™ with RemoteFX™ and Omnissa Horizon®, this device can provide a rich and efficient computing experience.

Easy management and maintenance

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.

Atrust mt185L Mobile Thin Client

System

Processor	Intel® i3-N305
-----------	----------------

Memory

System Memory	4 GB (Manufacturing option : 8 GB)
Storage	64 GB

Display

LCD Type / Resolution	14" / 1920 x 1080 FHD, LED backlit
HDMI® / Type-C Display	Up to 4096 x 2160 @ 60Hz

I/O Interfaces

I/O Ports	1 x HDMI® Port, 2 x USB-A Port (USB 3.2 Gen 1), 2 x USB-C Port (USB 3.2 Gen 2), 1 x Audio Combo Jack, 1 x Webcam, 2 x 2W Internal Speaker, 1 x Internal Microphone, 1 x DC IN
Keyboard	LED backlit keyboard
Touch Pad	Click button integrated touchpad

Networking

Ethernet	USB-A Port (USB 3.2 Gen 1) to Gigabit Ethernet Adapter
Wireless	802.11 a / b / g / n / ac / ax

Dimensions / Weight

Dimensions	(W) 322 x (D) 222 x (H) 15.95 mm
Weight	1.23 kg (approximate)

Environment

Operating Temperature	5°C ~ 35°C
Non-operating Temperature	-20°C ~ 60°C
Operating Humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating Humidity (Rh)	5% ~ 95% (non-condensing)

Power Adapter

USB Type-C	65W USB-C Power Adapter
AC Adapter	19V, 65W, 3.42A (Optional)
Battery Capacity	50 WHrs, 4S1P, 4-cell Li-ion, Average Time : 6h (approximate)

Software

Operating System	Atrust OS
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA / HDX™ Microsoft® RDP™ with RemoteFX™ Omnissa Horizon®

Security

TPM	fTPM 2.0 (Manufacturing option : dTPM 2.0)
-----	--

Copyright © 2026 Atrust Computer Corp. Other trademarks may be trademarks of their respective owners.
The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein.
To learn more, visit www.Atrustcorp.com.



Atrust Computer Corp.
3F, 361 Fusing 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan
T.+886-3-3288837 F.+886-3-3288973
sales@atrustcorp.com www.atrustcorp.com