


## Thin Client Atrust t21

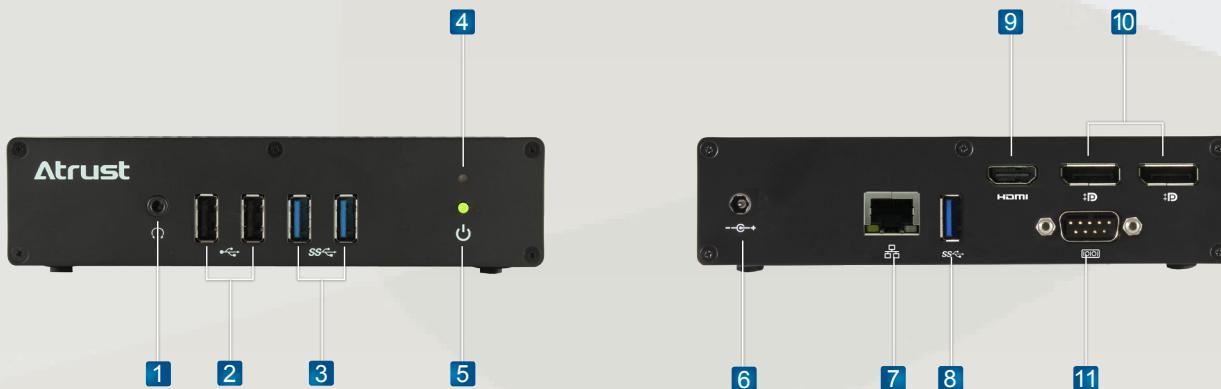

- 1 Headphone Port**  
Connects to a headphone or speaker system.
- 2 USB 2.0 Port x 2**  
Connects to a USB device.
- 3 USB 3.0 Port x 2**  
Connects to a USB device.
- 4 Power LED**  
Indicates the status of power.
- 5 Power Button**  
Press to turn on/off the client.
- 6 DC IN**  
Connects to an AC adaptor.

- 7 LAN Port**  
Connects to a host server through a LAN switch.
- 8 USB 3.0 Port**  
Connects to a USB device.
- 9 HDMI® Port**  
Connects to a monitor.
- 10 DisplayPort x 2**  
Connects to a monitor.
- 11 Serial Port ( RS-232 )**  
Connects to a serial port device.

### Atrust t21 Features

- Durable and quiet design
- Low power consumption
- Simplified management
- Lower total cost of ownership ( TCO )
- Slim and robust design
- Supported Protocols  
t21 supports the following protocols:  
Citrix® ICA/HDX™, Microsoft® RDP™, VMware Horizon
- Ingress Protection Rating IP50

# Atrust t21

System	
Processor	Intel® Elkhart Lake J6412 Quad Core
Memory	
System memory	4 GB ( Manufacturing option : 8 GB )
Storage	
Storage	128 GB M.2 NVMe SSD ( Manufacturing option : 256 GB / 512 GB )
Graphics	
Maximum resolution	4096 x 2160@60Hz
I/O Interfaces	
I/O ports	Front : 2 x USB-A Port ( USB 2.0 ), 2 x USB-A Port ( USB 3.2 Gen 1 ), 1 x Headphone Port Rear : 2 x Dual-Mode Displayport, 1 x HDMI® Port, 1 x USB-A Port ( USB 3.2 Gen 1 ), 1 x Serial Port, 1 x LAN Port, 1 x DC IN
Networking	
Ethernet	10 M / 100 M / 1 G
Dimensions / Weight	
Dimensions	( W ) 155 x ( D ) 109.6 x ( H ) 37 mm
Weight	854g ( approximate ) * Without Accessories
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 40°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity ( Rh )	10% ~ 90% ( non-condensing )
Non-operating humidity ( Rh )	5% ~ 95% ( non-condensing )
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current ( max )	3A
Output voltage	+12V DC
Software	
Operating system	Windows® 10 IoT Enterprise LTSC 2021 Windows® 11 IoT Enterprise LTSC 2024
System Management	ADM ( Atrust Device Manager )
Ingress Protection Rating	
	IP50
Accessories	
	Power Adapter, Power Cord Adapter Holder ( Option ) : ( W ) 39.5 x ( D ) 108 x ( H ) 58.8 mm / Weight : 115 g VESA Kit ( Option ) : ( W ) 115.3 x ( D ) 62.8 x ( H ) 14.8 mm / Weight : 42 g Bracket Kit ( Option ) : ( W ) 212.5 x ( D ) 120 x ( H ) 60.2 mm / Weight : 944 g

© 2026 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit [www.atrustcorp.com](http://www.atrustcorp.com).



**Atrust Computer Corp.**

3F., 361, Fusing 1st Rd., Gueishan Dist., Taoyuan City 333, Taiwan  
T.+886-3-3288837 F.+886-3-3288973  
sales@atrustcorp.com www.atrustcorp.com