





Remote PC Array 2U 10-Node RPA120 (PC170)

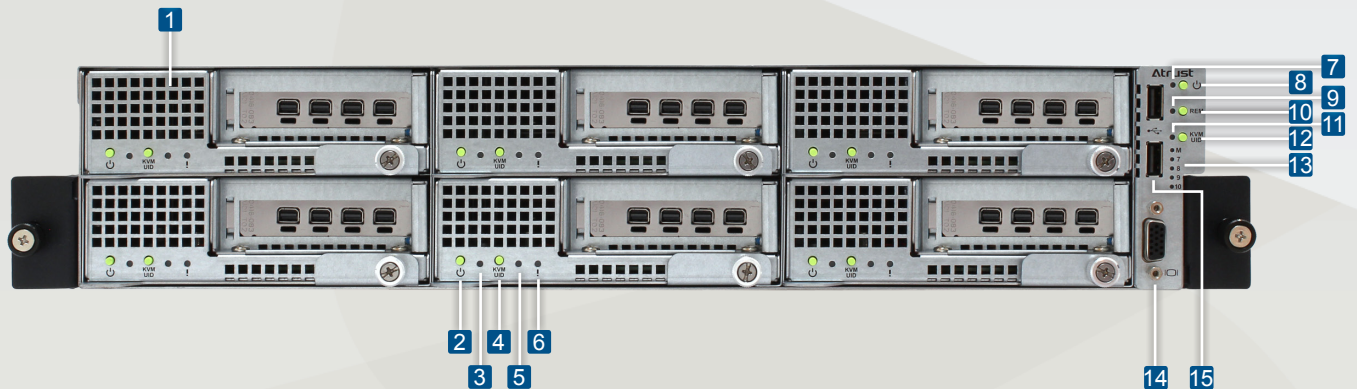

Front View

- | | | |
|--|--|--|
| 1 PC170 + GPU | 7 Power / UID / Alert LED
Green : Chassis Power on.
Amber : Chassis alert.
Green or Amber blinking : Chassis identified or some PC Nodes are identified. | 12 KVM / UID Button <ul style="list-style-type: none">• Short-pressing button : Switch Normal mode and KVM mode of Management and Node 7, 8, 9, 10.• Long-pressing button (over 4 sec) : Toggle chassis identified status. |
| 2 Node Power Button
Press button to turn on/off Node. | 8 Power Button
Press button to turn on/off chassis. | 13 M, 7, 8, 9, 10 LEDs
In Normal mode : These LEDs represent power status of Management, Node 7, 8, 9, 10.
In KVM mode : KVM for one of Management or Node 7, 8, 9, 10. is selected. |
| 3 Power / UID LED
Green : Power on.
Green blinking : Node identified (UID). | 9 REM LED
Green : Remote access enabled. | 14 VGA
Connects to a monitor. |
| 4 KVM / UID Button
Press button : <ul style="list-style-type: none">• Short-pressing button : KVM will be selected and the KVM LED will be turned on.• Long-pressing button (over 4 sec) : Toggle Node identified status. | 10 REM Button
Press button to toggle remote access status. | 15 USB 2.0 Port x 2
Connects to the USB device. |
| 5 KVM LED
Green : KVM selected. | 11 KVM LED
On : KVM mode selected for Management and Node 7, 8, 9, 10.
Off : Normal mode. | |
| 6 Alert LED
Amber : PC Node alert. | | |

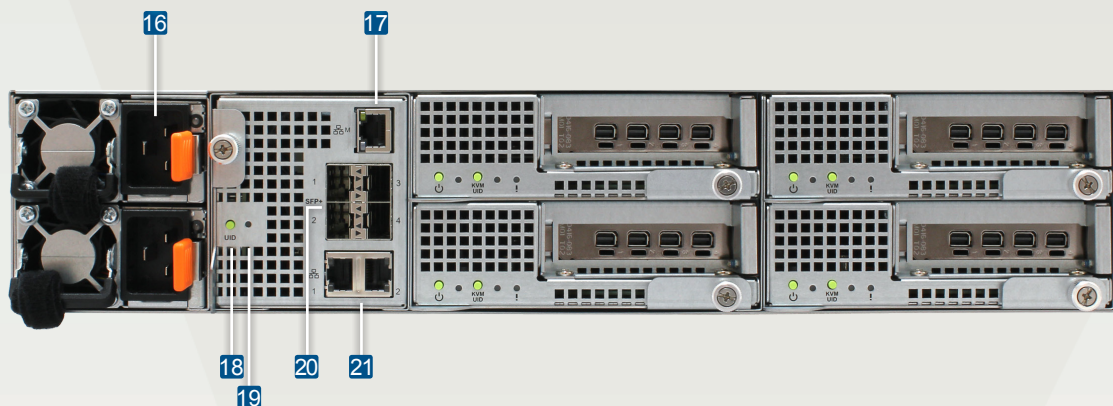

Rear View

- | | | |
|---|---|--|
| 16 Hot-swappable power supply (AC IN)
Connects to a power outlet. | 18 UID Button
Toggle chassis identified status. | 20 10 GbE Uplink Port
Connects to a network. |
| 17 Management Port (1 Gb)
Connects to a network. | 19 UID LED
Green blinking : Chassis identified or some PC Nodes are identified. | 21 1 GbE Uplink Port
Connects to a network. |

Atrust RPA120 (PC170)

Node	
Processor	Intel® Core™ i9-14900, i7-14700, i5-14500, i7-13700E
Memory	DDR5 ECC U-DIMM 32 GB (Total 4 DIMM slots, Dual-Channel, Max. 192 GB)
GPU	Standard modules, up to 10 cartridges : • NVIDIA® RTX A1000 8 GB • NVIDIA® L4 Tensor Core GPU 24 GB Advanced modules, up to 5 cartridges (upgrade option) : • NVIDIA® RTX 4000 SFF Ada Gen. 20 GB
Storage	M.2 PCIe NVMe SSD 128 GB / 256 GB / 512 GB 1 TB / 2 TB (upgrade option)
Network	Dual GbE NIC Per PC cartridge
Form Factor	2U 10-Node
Ethernet Switch	
VLAN	Tag / Untag
LAG	Static, Dynamic (LACP)
Spanning-Tree	STP, RSTP, MSTP
Management	GUI, CLI
Chassis	
Dimensions	(W) 430 x (H) 86 x (D) 864 mm
Weight	32 kg (approximate) (including 10 cartridges fully loaded)
Built-in Component	10 x Cartridge 1 x KVM switch 1 x Ethernet switch 1 x Management console
Power Supply	Dual 2000W redundant power supply 200-240 Vac (hot-swap)
Operating Humidity (Rh)	10% ~ 90% (non-condensing)
Operating Temperature	5°C ~ 35°C
I/O Ports	Front : 1 x VGA 2 x USB 2.0 Rear : 2 x 1 GbE (RJ45) 4 x 10 GbE (SFP+) 1 x Management port (RJ45)
OS	
Supported OS	Microsoft® Windows® 10 Pro Microsoft® Windows® 11 Pro

Copyright © 2025 Atrust Computer Corp. Other trademarks may be trademarks of their respective owners.
The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein.
To learn more, visit www.Atrustcorp.com.